

MOUNTING PROCEDURE

KIT LICENCE PLATE
HONDA CB500 F '16

HCF5104-16

WWW.BARRACUDAMOTO.COM

FIXING PROCEDURE:

- REMOVE THE ORIGINAL LICENCE PLATE AND APPROACH THE BARRACUDA SPECIFIC BRACKETS UNDER THE UNDERTAIL FINDING THE FIXING POINTS;
- FIX THE LICENCE PLATE USING THE SCREWS AND PUT THE THICKNESS IN THE KIT, LOCK ALL AND REPEAT THE OPERATION FOR ALL THE FIXING POINT;
- APPLY THE "X" LICENCE PLATE TO THE JUNCTION OF THE SPECIFIC BRACKET;

KIT

X1. SPECIFIC BRACKET
X4. THICKNESS
X4. SCREW 6X25 "ROUND HEAD"
X4. NUT Ø 6 AUTOLOCK
X4. WASHER Ø 6 "LARGE"
X1. "X" LICENCE PLATE


Nut Ø 6

Washer Ø 6 "Large"

Thickness

Specific bracket

Screw 6x25

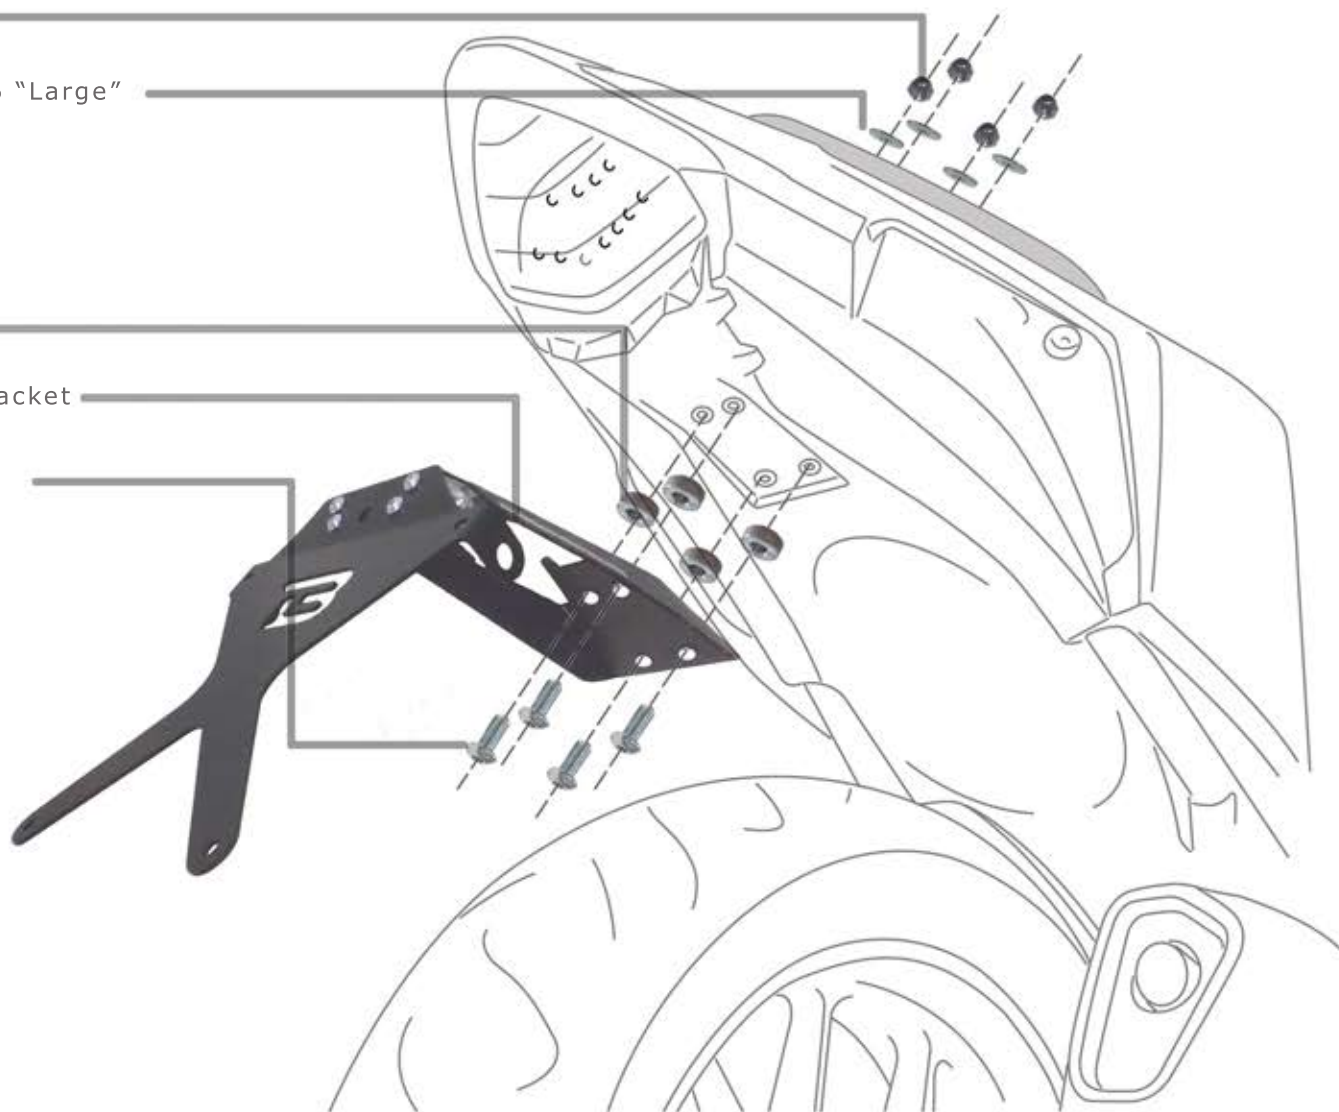

NOTE: WE ADVISE TO TAKE AN INCLINATION NOT EXCEEDING 30° TO AVOID STRUCTURAL POSSIBLE BROKEN